

Installation Instructions

NetBright® Path Light

MBN580

Thank you for purchasing the Mr Beams® NetBright® Path Light. We are committed to eliminating darkness using the latest in Light-Emitting Diodes (LEDs). LEDs are the most efficient and durable light sources available. We are certain that your light will contribute to a safer environment and provide light where you need it at a very reasonable cost.

What is included per light:

- 2 Screws & 2 Anchors
- 1 Stake & 1 Bracket

What you need to install:

- 1 Screwdriver (flathead)
- 1 Screwdriver (phillips)
- 1 Drill (6mm drill bit)
- 3 C-cell Alkaline Batteries (per light)

Path Light Features:

Motion/Light Sensor: The Path Light instantly turns on when it detects motion from up to 15 feet away. The light sensor conserves battery life by preventing the light from activating in daylight.

Auto Shut-off: Path Light shuts off automatically after 20 seconds if no motion is detected.


Bright LED: 35 lumens cover up to 120 sq ft.

Durable, Weather Resistant: Tight seals and UV resistant material allow the light to work in all weather conditions.

GlowMode™ Option: Emits soft glow when darkness is sensed for safety.

Tips:

- Use only new alkaline C-Cell batteries with 1.5V rating.
- Do not mix old and new batteries. If batteries are not new, it may cause the light to malfunction.
- Install batteries with polarity in correct position.
- Light may activate when batteries are inserted. Simply take light into a dark room, allow batteries to settle, then test activation.
- **If your light will not turn off, it means that it is time to replace the batteries.**

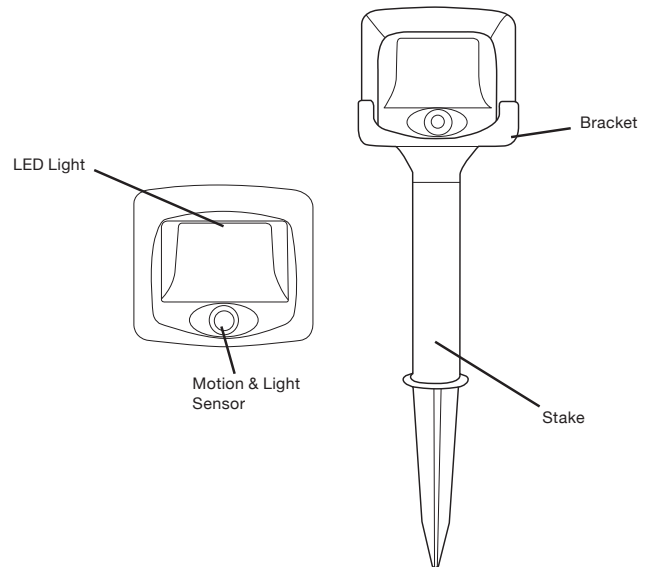

NOTE: Light sensor allows light to activate only in darkness. We recommend you test in a dark room or closet.

Mounting with Stake


1. Remove rear cover of Path Light by removing 2 screws on back.
2. Set "GLOW" to ON to activate GlowMode™ feature. Setting "GLOW" to OFF will extend battery life.
3. Insert 3 C-cell batteries into light. Replace cover.
4. Gently hammer stake into desired location with a hammer or mallet.
5. Insert Path Light into mounting bracket.
6. Insert mounting bracket into stake.

Mounting on Wall



1. Determine location for mounting light. Flip rear cover upside down and use holes for thumbscrews as template to mark two holes for anchors and/or screws (included). We recommend mounting the screws parallel to the ground if mounting on a vertical surface. Make sure that screws are precise distance from each other as defined by the distance of the thumbscrew holes. Replace rear cover and thumbscrews.
2. If using anchors, use 3/16" drill bit to drill holes and insert anchors. Drive screws into anchors so that screw head protrudes 1/8" from the surface. If using only screws, use 1/8" drill bit to drill holes.
3. Slide light down so screws are securely held by track.

Setting up Lights to a Network



After inserting the batteries, choose a group or channel for your lights with the dipswitches next to the battery compartment. Ensure all units are on the same channel by matching dipswitches.

* Lights set to the same group that are within 150 ft range of each other will work together automatically

Battery Caution:

- 1) Do not mix old and new batteries
- 2) Do not mix Alkaline, Standard (Carbon-Zinc) or Rechargeable (Nickel Cadmium or Nickel Metal Hydride) batteries
- 3) Do not dispose of batteries in fire
- 4) Batteries should be recycled or disposed of as per state and local guidelines

MR BEAMS®
Surprisingly Bright Light Anywhere
www.mrbeams.com

* Visit our website to view installation video.
* 1 year limited warranty. Visit site for details.

600 Beta Drive, Unit 100, Mayfield Village, OH 44143
877.298.9082

